




I have permanent result



TILE FIXING SYSTEMS

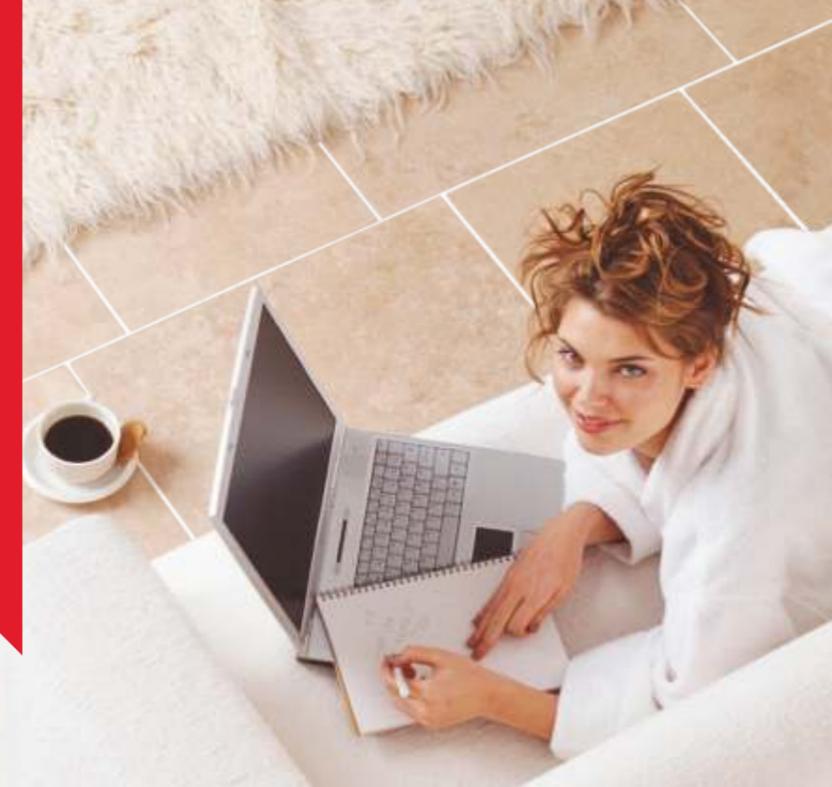

Visit our website.



CERTIFIED COMPANY

THESSALONIKI, GREECE  
17th km Thessaloniki - Ag. Athanasios Road  
P.O. BOX 1043, 570 03 Ag. Athanasios  
T +30 2310 576 000, F +30 2310 722 475

**isomat**  
building quality


ISOMAT S.A.  
BUILDING CHEMICALS & MORTARS  
[www.isomat.eu](http://www.isomat.eu)  
[export@isomat.eu](mailto:export@isomat.eu)

1014

**isomat**  
building quality

## ISOMAT AK-MARBLE

Polymer modified marble and granite adhesive

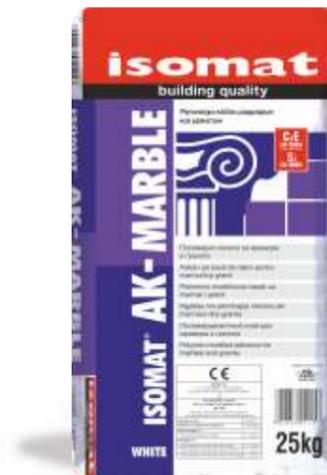

### DESCRIPTION

ISOMAT AK-MARBLE is a fast-setting, polymer modified cement-based marble and granite adhesive. It provides high initial and final adhesive strength and moisture resistance. It possesses increased open time for application. It prevents staining of sensitive overlays, such as marble layers, due to fast retention of water.

It is classified as type **C2 E S1** adhesive according to **EN 12004** and **EN 12002**.

### FIELDS OF APPLICATION

ISOMAT AK-MARBLE is suitable for fixing marble or granite on walls or floors on various surfaces and especially where high adhesion and moisture resistance are required. It is suitable for indoor or outdoor applications.

COLOR	PACKAGE	PIECE/PALLETE
White	25 kg	54



## ISOMAT AK25

High performance, elastic, polymer-modified tile adhesive



### DESCRIPTION

ISOMAT AK 25 is a high performance tile adhesive with high elasticity. It is cement based enriched with polymers (resins). It provides high adhesive strength and resistance to moisture. It is qualified as absolutely non-slip (zero slipping of the tile) and possesses increased open time.

It is classified as type **C2 TE S2** adhesive according to **EN 12004** and **EN 12002**.

### FIELDS OF APPLICATION

ISOMAT AK 25 is suitable for fixing absorptive or non-absorptive tiles (e.g. "gres porcelanato"), natural stone, decorative bricks, large tiles, on wall or floor. Especially appropriate where high adhesion, elasticity and moisture resistance are required for vibrative or dimensionally unstable substrates such as balconies, terraces, underfloor heating systems, metal surfaces, wood floorings, old tile layers etc. Suitable for indoor and outdoor applications.

COLOR	PACKAGE	PIECE/BOX	PIECE/PALLETE
Grey, White	25 kg	-	54
White	5 kg	4	160



## ISOMAT AK20

High performance, flexible, polymer-modified tile adhesive



### DESCRIPTION

ISOMAT AK 20 is a high quality, polymer-modified, cement-based tile adhesive. It provides high initial and final adhesive strength, resistance to moisture and elasticity. It is qualified as absolutely non-slip (zero slipping of the tile) and possesses increased open time.

It is classified as type **C2 TE S1** adhesive according to **EN 12004** and **EN 12002**.

### FIELDS OF APPLICATION

ISOMAT AK 20 is suitable for fixing absorptive or non-absorptive tiles (e.g. "gres porcelanato"), natural stone, decorative bricks, large tiles etc. on walls or floors on various substrates, especially where high adhesion, elasticity and moisture resistance are required (e.g. old tile layers, floors with in-floor heating etc.). Suitable for indoor or outdoor use.

COLOR	PACKAGE	PIECE/BOX	PIECE/PALLETE
Grey, White	25 kg	-	54
White	15 kg	-	90
Grey, White	5 kg	4	160



## ISOMAT AK-MEGARAPID

Two-component, fast-setting, elastic tile adhesive



### DESCRIPTION

ISOMAT AK-MEGARAPID is a two-component, fast-setting tile adhesive. It consists of a cement-based powder mortar (component A) and a resin emulsion (component B). It provides high initial and final adhesive strength, exceptional flexibility and moisture resistance. It has increased open time for the application.

It is classified as type **C2 FE S2** adhesive according to **EN 12004** and **EN 12002**.

### FIELDS OF APPLICATION

ISOMAT AK-MEGARAPID is suitable for fixing absorptive and non-absorptive tiles (e.g. "gres porcelanato"), natural stone, decorative bricks, large tiles etc, on wall or floor. Especially appropriate for vibrative or dimensionally unstable substrates such as gypsum-boards, chip-boards, underfloor heating systems, balconies, terraces, metal surfaces, swimming pools etc. It is ideal for floors with heavy traffic and for areas that must be ready for use within short time. Suitable for indoor and outdoor applications.

COLOR	PACKAGE	PIECE/PALLETE
White	33 kg (A + B)	54(A) + 54(B)

